

Anti-slip/Light duty conveyor belt

Application

Automatic assembly line for tobacco \ baggage \ carton \ cavans bag...etc.

Light Duty Conveyor Belt



EP135, 2Ply x 1mm x Bare

Application

Electronic industry and factory production lines for carrying electronic parts, Electronic products assembling line, automatic assembling line.

Characteristic

1. Using green color prevents eye-fatigue.
2. Low friction factor

EP135, 2Ply x 2mm x Bare

Application

Carrying general products in wholesale or distribution center.

Characteristic

Low friction factor

EP135, 2Ply x Bare x Bare

Application

For conveying products which low friction need, such as Agriculture products, production line, distribution center, etc.

Characteristic

Low friction factor on both sides

C. C. x 3Ply x Bare

Application

Carrying rubber materials or products been heated, production line, distribute center

Characteristic

Low friction factor on both sides

Rough Top Belt

Meshes pattern Rough Top Belt

Characteristic

Excellent slip prevent

Standard size

Width : 1800 m/m(72")
Length : 200 m(660')
Carcass : 1plies~3plies
Thickness : 5mm~10mm



Impression Belt

Characteristic

Excellent slip prevent

Standard size

Width : 2000 m/m(80")
Length : 100 m(330')~500 m(1650')
Carcass : 1plies~3plies
Thickness : 1mm~10mm




Chevron Belt

Application

quarry, coal, mineral gravels, woods, gunny or transportation at inclined angles


C6

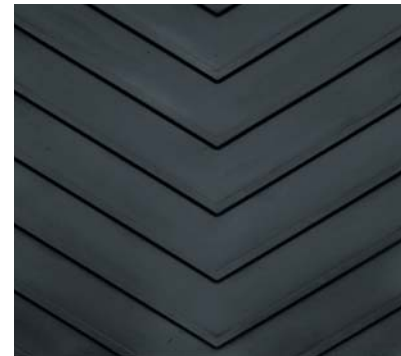

V6



C12

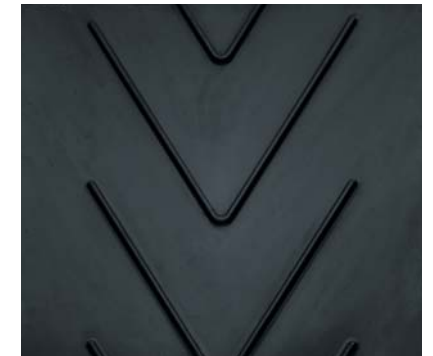

C15



C25



Y32



C6 / C15 / C25 / Y32 / V6

Chevron Type	Pattern	C.H(mm)	C.W(mm)	C.P(mm)	Belt Width	
					mm	inch
C6	C6-P230	6	230	75	300-400	12"-16"
	C6	6	300-1200	100	300-1200	12"-48"(1215)
V6	V6	6	600-1800	75	600-1800	24"-72"
C12	C12-V800	12	800	150	800-1200	32"-48"(1206)
C15	C15-V330	15	330	250	400-600	16"-24"
	C15-P385	15	385	250	500-800	20"-32"(800)
	C15-V450	15	450	300	600-800	24"-32"(800)
	C15-P500	15	500	340	550-750	22"-30"(750)
	C15-P600	15	600	250	750-1000	30"-40"
C25	C15-P750	15	750	250	900-1200	36"-48"(1215)
	C25-P450	25	450	335	600-750	24"-30"(750)
	C25-P550	25	550	250	600-800	24"-32"
Y32	C25-P750	25	750	330	900-1200	36"-48"(1215)
	Y32-P450	32	450	255	500-800	20"-32"(800)
	Y32-P600	32	600	300	800-1000	32"-36"
	Y32-P800	32	800	333	1050-1200	36"-48"