


# BS / DIN (Simplex) Standard Roller Chain

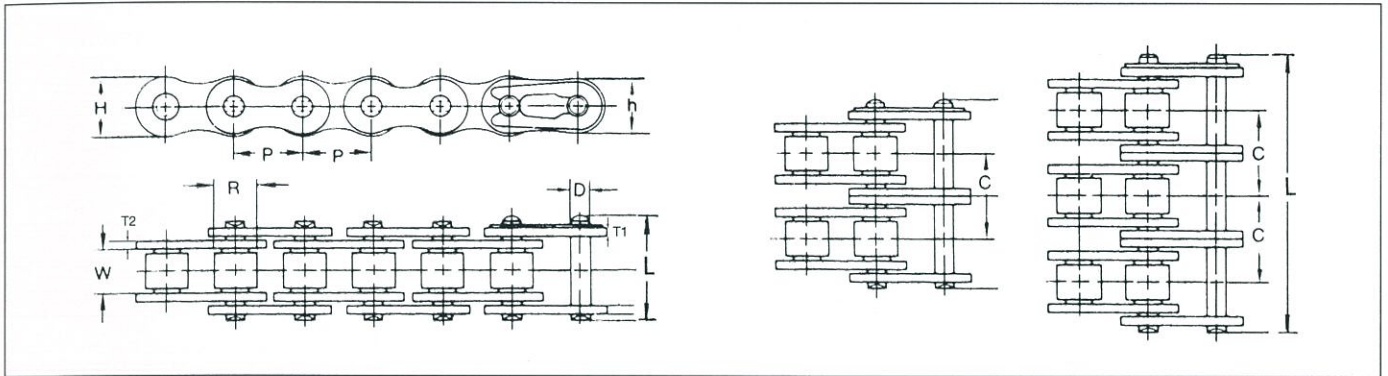

unit : mm

Fujimoto BS Chain No.	Pitch	Inner Width	Roller Dia	Pin		Transverse Pitch	Plate				Average Breaking Load (kgf)
	P	W	R	D	L	C	T1	T2	H	h	
FC 06B-1					13.5						1,050
FC 06B-2	9.525	5.72	6.35	3.28	23.8	10.24	1.00	1.30	8.26	8.26	1,890
FC 06B-3					34.0						3,010
FC 08B-1					17.0						2,050
FC 08B-2	12.70	7.75	8.51	4.45	31.0	13.92	1.50	1.50	11.81	10.92	3,700
FC 08B-3					44.9						5,600
FC 10B-1					19.6						2,750
FC 10B-2	15.875	9.65	10.16	5.08	36.2	16.59	1.50	1.50	14.73	13.72	5,380
FC 10B-3					52.8						8,340
FC 12B-1					22.7						3,250
FC 12B-2	19.05	11.68	12.07	5.72	42.2	19.46	1.70	1.80	16.13	16.13	6,530
FC 12B-3					61.7						9,970
FC 16B-1					36.1						7,100
FC 10B-2	25.40	17.02	15.88	8.28	68.0	31.88	3.20	4.0	21.08	21.08	12,830
FC 10B-3					99.9						20,000
FC 20B-1					43.2						10,700
FC 20B-2	31.75	19.56	19.05	10.19	79.7	36.45	3.50	4.50	26.42	26.42	21,000
FC 20B-3					116.1						28,750
FC 24B-1					53.4						17,800
FC 24B-2	38.10	25.40	25.40	14.63	101.8	48.36	5.20	6.0	33.40	33.40	31,360
FC 24B-3					150.0						48,880
FC 28B-1					65.1						22,500
FC 28B-2	44.45	30.99	27.94	15.90	124.7	59.56	6.30	7.50	37.08	37.08	40,320
FC 28B-3					184.3						59,280
FC 32B-1					67.4						27,800
FC 32B-2	50.80	30.99	29.21	17.81	126.0	58.55	6.30	7.0	42.29	42.29	50,400
FC 32B-3					184.5						67,000